

UNO-2484G

Intel® Core™ i7/i5/i3 Regular-Size Modular Box Platform (MBP) with 4 x GbE, 1 x mPCIe, HDMI, DP

NEW



Features

- Intel® Core™ i7/i5/i3 Processor with 8GB DDR4 built-in Memory
- 4 x GbE, 4 x USB 3.0, 1 x HDMI, 1 x DP, 4 x RS232/422/485
- Stackable 2nd layer for up to 4 iDoor extension or customize for domain applications
- Compact Fanless Design
- Ruggedized by Zero cable and lockable I/O design
- Dedicated TPM2.0 microcontroller designed for hardware security
- Diverse system I/O and Isolated Digital I/O by iDoor Technology
- Supports Fieldbus Protocol by iDoor Technology
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology
- Supports 30+ iDOOR combination with four main categories

Introduction

Advantech's new generation UNO-2000 series of Embedded Automation Computers are Fanless with highly ruggedized with embedded operation system. New UNO-2000 series implement Universal, Customized, and Domain idea into modular design concept which provides flexible and time-to-market support in variety of applications. The series also includes iDOOR technology which supports automation feature-extensions such as Multiple I/O Peripheral, Industrial Fieldbus, Smart I/O Communication, and Signal Communication. New UNO-2000 series including pocket, small, and regular-size form-factors with indicated market segments in terms of different kinds of smart factory application categories such as Equipment Connectivity (EC), Process Visualization (PV), Environment Management (EM), and Dispatch Management (DM) solution. New UNO enables smart factory and fulfill all application.

Specifications

General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 200 x 140 x 40 (7.8" x 5.6" x 1.6") for single stack UNO-2484G version
200 x 140 x 70 (7.8" x 5.6" x 2.8") for double stack UNO-2484G version
- **Form Factor** Regular Size with stackable design
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional), DIN-rail (Optional)
- **Weight (Net)** Single stack: 1.4kg (3.09lbs)
Double stack: 1.6kg (3.53lbs)
- **Power Requirement** 10 - 36 V_{DC}
- **Power Consumption** 55W (Typical), 95.2W (Max)
- **OS Support** Microsoft® Windows 7, 10, Advantech Linux (UNO-2484G-6 series)
Microsoft® Windows 10, Advantech Linux (UNO-2484G-7 series)

System Hardware

- **BIOS** AMI EFI64 Mbit
- **Watchdog Timer** Programmable 255 levels timer interval, from 1 to 255 sec
- **Processor** 6th Gen Intel Core i7-6600U, 2.6GHz
i5-6300U, 2.4GHz
i3-6100U, 2.3GHz
7th Gen Intel Core i7-7600U, 2.8GHz
i5-7300U, 2.6GHz
i3-7100U, 2.4GHz
- **Memory** Built-in 8GB DDR4 2133 MHz
- **Graphics Engine** Intel® HD Graphics 620
- **Ethernet** LAN A: Intel i219-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802
LAN B-D: Intel i210-IT GbE, 802.1Qav, IEEE1588/802.1AS, 802
- **LED Indicators** LEDs for Power, HDD, LAN (Active, Status), RTC Battery low
- **Storage** One mSATA (slot shared with mPCIe slot)
Two drive bay for SATA 2.5" SSD/HDD (Support RAID 0/1)
- **Expansion** 1 x full-size mPCIe slot for single stack version
4 x full-size mPCIe slots for double stack version

I/O Interfaces


- **Serial Ports** 4 x RS 232/422/485
- **LAN Ports** 4 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- **USB Ports** 4 x USB3.0
- **Displays** 1 x HDMI supports 1920 x 1080 @60Hz,
1 x DP supports 3840 x 2160 @30Hz
Line-out
- **Audio**
- **Power Connector** 1 x 2 Pins, Terminal Block

Environment


- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7 m/s airflow
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11 ms
- **Vibration Protection** Operating, IEC 60068-2-64, 3 Grms, random, 5 ~ 500 Hz, 1hr/axis (mSATA)
- **Ingress Protection** IP40

Installation Scenario

DIN-rail Mount Illustration




VESA Mount Illustration




Dimensions

Unit: mm


UNO-2484G Single stack version

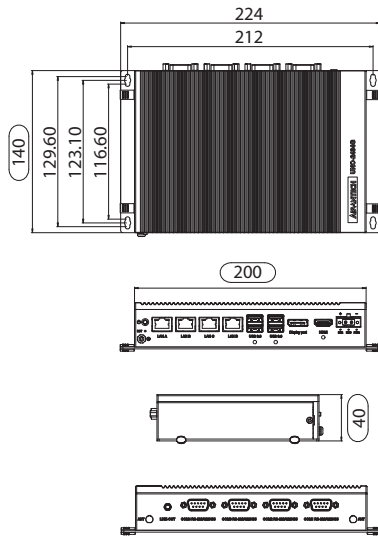


UNO-2484G double stack version

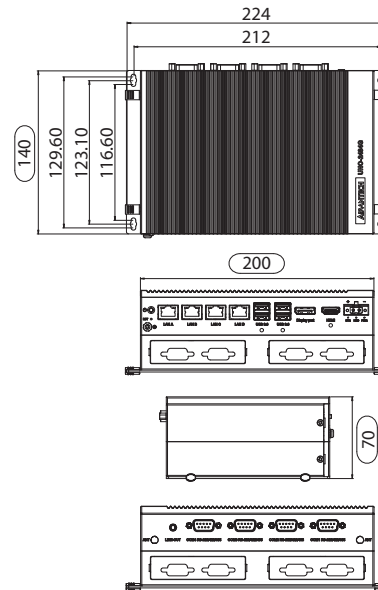

Front I/O View

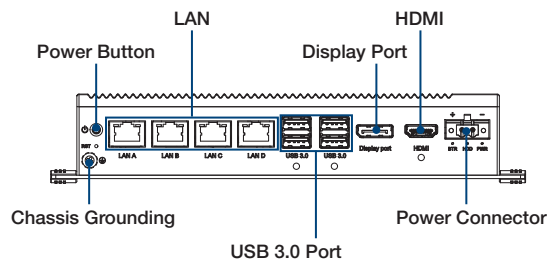

Rear I/O View

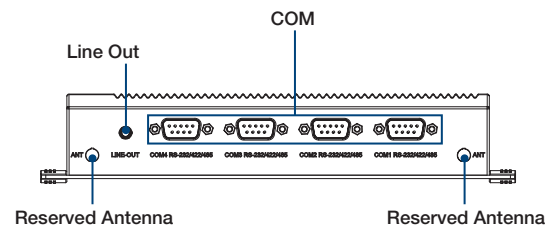

Ordering Information

	Ordering Part Number	CPU generation	CPU	mPCIe slot	iDoor	USB	COM	LAN
Single Stack	UNO-2484G-7731AE	6 Gen.	i7-7600U	1	x	4	4	4
	UNO-2484G-7531AE		i5-7300U					
	UNO-2484G-731AE		i3-7100U					
	UNO-2484G-6731AE	7 Gen.	i7-6600U					
	UNO-2484G-6531AE		i5-6300U					
	UNO-2484G-6331AE		i3-6100U					
Double Stack	UNO-2484G-7732AE	6 Gen.	i7-7600U	4	v	4	4	
	UNO-2484G-7532AE		i5-7300U					
	UNO-2484G-7332AE		i3-7100U					
	UNO-2484G-6732AE	7 Gen.	i7-6600U					
	UNO-2484G-6532AE		i5-6300U					
	UNO-2484G-6332AE		i3-6100U					

iDoor Modules

- PCM-24S2WF-BE 802.11 a/b/g/n 2T2R w/ Bluetooth4.0, Half-size mPCIe, 2-port SMA
- PCM-24S23G-AE 6-band HSPA Cellular Module, GPS, SIM holder, SMAx2
- PCM-24R2GL-AE 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24D2R2-BE 2-Port Isolated RS-232 mPCIe, DB9
- PCM-24D4R4-BE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37

Contact Advantech for all compatible iDoor lists

Optional Accessories

- 96PSA-A150W24T2 Power Adapter 150W
- 96PSA-A120W24T2 Power Adapter 120W
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- UNO-2484G-EKAE UNO-2484G second stack expansion module
- UNO-2000G-VMKAE UNO-2000 VESA Mount Kit
- UNO-2000G-DMKAE UNO-2484G DIN RAIL Kit
- UNO-2000-LKAE Cable lockable kit 10 units/per pack
- UNO-2484G-S2AE External swappable HDD extension kit (Dual HDD bay)
- 20703WE7PS0009 WS7P X64 MUI V4.18 B023 Image
- 2070015318 WIN10ENT 2016LTSB V6.01B056 for UNO-2484G i7 version
- 2070015319 WIN10ENT 2016LTSB V6.01B056 for UNO-2484G i5/i3 version